

Royal Kissan Agro

MACHINES CATALOGUE






X

- Inter Cultivator / Power Weeder ... 04
- Grass Stubble Mower ... 06
- Mini Inter Cultivator ... 06

E

- Baby Weeder ... 07
- Seeder ... 07
- Brush Cutter ... 08
- Chain Saw ... 09

D

- Water Pump ... 09
- Hose Pipe ... 10
- Earth Auger ... 11


Z

- Engines ... 11
- Sprayer ... 12
- Chaff Cutter ... 14
- Maize Thresher ... 14

I

- Reaper ... 14

Disclaimer: The images shown / product specifications are for reference purpose only & may not be exact representation of the product & are subject to change without prior notice.





PETROL

INTER CULTIVATOR / POWER WEEDER



RK-ICP-UP170-SH (ULTRA PREMIUM)
ENGINE TYPE: 170F, 4-STROKE, AIR COOLING
DISPLACEMENT: 212CC
RATED POWER: 4KW
ENGINE SPEED: 3600RPM
KEY FEATURE: SHOCK ABSORBER HANDLE, SRFMTTI TESTED/SUBSIDY APPROVED
START: RECOIL START
GEARS: -1, 0, 1, 2
FUEL TANK CAPACITY: 3.6L
COLOUR: YELLOW



RK-177F-WOLF (ULTRA PREMIUM)
ENGINE TYPE: 177F, BELT DRIVE MODEL, 4 STROKE
DISPLACEMENT: 270CC
RATED POWER: 5.5KW
ENGINE SPEED: 3600RPM
KEY FEATURE: LESS VIBRATION & 360 DEGREE EASY TO TURN HANDLE
STRUCTURE TYPE: DOUBLE AXLE WHEEL TYPE
START: RECOIL START
FUEL TANK CAPACITY: 4L
COLOUR: RED



RK-170F (PREMIUM)
ENGINE TYPE: 170F, 4-STROKE, AIR COOLING
DISPLACEMENT: 212CC
RATED POWER: 3.9KW
ENGINE SPEED: 3200RPM
KEY FEATURE: FMTTI TESTED / SUBSIDY APPROVED
START: RECOIL START
GEARS: -1, 0, 1, 2
FUEL TANK CAPACITY: 3.6L
COLOUR: RED



RK-ICP-P177-LDE (PREMIUM)
ENGINE TYPE: 177F, 4 STROKE, AIR COOLING
DISPLACEMENT: 270CC
RATED POWER: 5.22KW
ENGINE SPEED: 3600RPM
KEY FEATURE: KAMA HANDLE, LIGHT, DOUBLE FENDER, ATV TYRE, 40 BLADES & SIDE DISK
START: ELECTRIC START
GEAR: -1, 0, 1, 2 **FUEL TANK CAPACITY:** 4L
COLOUR: RED



RK-ICP-P170-LDE (PREMIUM)
ENGINE TYPE: 170F, 4 STROKE, AIR COOLING
DISPLACEMENT: 212CC
RATED POWER: 4KW
ENGINE SPEED: 3600RPM
KEY FEATURE: LIGHT, COVER & DOUBLE FENDER, ATV TYRE
START: ELECTRIC START
GEAR: -1, 0, 1, 1
FUEL TANK CAPACITY: 3.6L
COLOUR: RED & ORANGE



NP-ICP-C177 (CLASSIC)
ENGINE TYPE: 177F, 4 STROKE, AIR COOLING
DISPLACEMENT: 270CC
RATED POWER: 5.22KW
ENGINE SPEED: 3600RPM
KEY FEATURE: 4*10 TYRES, KAMA HANDLE
START: RECOIL START
GEAR: -1, 0, 1, 2
FUEL TANK CAPACITY: 4L
COLOUR: RED



NB-ICP-C170-LSF / LDF (CLASSIC)
ENGINE TYPE: 170F, 4-STROKE, AIR COOLING
DISPLACEMENT: 212CC
RATED POWER: 3.9KW
ENGINE SPEED: 3600RPM
KEY FEATURE: LIGHT & SINGLE / DOUBLE FENDER
START: RECOIL START
GEARS: -1, 0, 1, 2
FUEL TANK CAPACITY: 3.6L
COLOUR: RED / LIGHT BLUE



NB-ICP-C170 (CLASSIC)
ENGINE TYPE: 170F, 4-STROKE, AIR COOLING
DISPLACEMENT: 212CC
RATED POWER: 3.9KW
ENGINE SPEED: 3600RPM
KEY FEATURE: 4*8 TYRES, 32 BLADES & SIDE DISK
START: RECOIL START
GEARS: -1, 0, 1, 2,
FUEL TANK CAPACITY: 3.6L
COLOUR: RED & BLACK / DARK BLUE



NP-ICP-C170 (CLASSIC)
ENGINE TYPE: 170F, 4 STROKE, AIR COOLING
DISPLACEMENT: 212CC
RATED POWER: 3.9KW
ENGINE SPEED: 3600RPM
KEY FEATURE: 4*8 SOLID TYRES, 32 BLADES & SIDE DISK
START: RECOIL START
GEAR: -1, 0, 1, 2
FUEL TANK CAPACITY: 3.6L
COLOUR: LIGHT BLUE





DIESEL

INTER CULTIVATOR / POWER WEEDER



RK-173F (ULTRA PREMIUM)

ENGINE TYPE: 173F, 4-STROKE, AIR COOLING
DISPLACEMENT: 247CC
RATED POWER: 4KW
ENGINE SPEED: 3200RPM
KEY FEATURE: FMPTTI TESTED/
 SUBSIDY APPROVED
START: RECOIL START **GEARS:** -1, 0, 1, 2
FUEL TANK CAPACITY: 2.35 L
COLOUR: RED



RK-ICD-UP186-SH (ULTRA PREMIUM)

ENGINE TYPE: 186F, 4 STROKE, AIR COOLING
DISPLACEMENT: 418CC
RATED POWER: 6.1KW
ENGINE SPEED: 3600RPM
KEY FEATURE: DOUBLE SHOCK ABSORBER HANDLE,
 SRFMTTI TESTED/SUBSIDY APPROVED
START: ELECTRIC START
FUEL TANK CAPACITY: 4.9L
COLOUR: YELLOW



NB-ICD-C173-LSF / LDF (CLASSIC)

ENGINE TYPE: 173F, 4-STROKE, AIR COOLING
DISPLACEMENT: 247CC
RATED POWER: 4KW
ENGINE SPEED: 3200RPM
KEY FEATURE: LIGHT & SINGLE
 / DOUBLE FENDER
START: RECOIL START **GEARS:** -1, 0, 1, 2,
FUEL TANK CAPACITY: 2.35L
COLOUR: LIGHT BLUE



NB-ICD-C173-SF / DF (CLASSIC)

ENGINE TYPE: 173F, 4-STROKE, AIR COOLING
DISPLACEMENT: 247CC
RATED POWER: 4KW
ENGINE SPEED: 3200RPM
KEY FEATURE: SINGLE / DOUBLE FENDER
START: RECOIL START
GEARS: -1, 0, 1, 2
FUEL TANK CAPACITY: 2.35L
COLOUR: DARK BLUE



NB-ICD-C178 (CLASSIC)

ENGINE TYPE: 178F, 4-STROKE, AIR COOLING
DISPLACEMENT: 296CC
RATED POWER: 4.3KW
ENGINE SPEED: 3600RPM
KEY FEATURE: KAMA HANDLE, 4 *10 TYRES
 & 32 BLADES
START: RECOIL START **GEARS:** -1, 0, 1, 2
FUEL TANK CAPACITY: 3.5L
COLOUR: RED



NB-ICD-C178-E (CLASSIC)

ENGINE TYPE: 178F, 4 STROKE, AIR COOLING
DISPLACEMENT: 296CC
RATED POWER: 4.3KW
ENGINE SPEED: 3600RPM
KEY FEATURE: KAMA HANDLE, 4*10 TYRES
 & 32 BLADES
START: ELECTRIC START
GEAR: -1, 0, 1, 2 **FUEL TANK CAPACITY:** 3.5L
COLOUR: RED



NB-ICD-C186-LCE (CLASSIC)

ENGINE TYPE: 186F, 4-STROKE, AIR COOLING
DISPLACEMENT: 418CC
RATED POWER: 6.1 KW
ENGINE SPEED: 3600RPM
KEY FEATURE: KAMA HANDLE, LIGHT
 & COVER
START: ELECTRIC START
GEARS: -1, 0, 1, 2,
FUEL TANK CAPACITY: 5.5L **COLOUR:** RED



NB-ICD-C186 (CLASSIC)

ENGINE TYPE: 186F, 4-STROKE, AIR COOLING
DISPLACEMENT: 418CC
RATED POWER: 6.1KW
ENGINE SPEED: 3600RPM
KEY FEATURE: KAMA HANDLE & 40 BLADES
START: RECOIL START
GEARS: -1, 0, 1, 2,
FUEL TANK CAPACITY: 4.9L
COLOUR: RED





NSM-GSM-020
ENGINE MODEL: 170F
ENGINE POWER: 212CC
MAX POWER: 4KW/3600RPM
TRANSMISSION: BELT
WORKING WIDTH: 200MM
WORKING DEPTH: 50MM



NSM-GSM-028
ENGINE MODEL: 170F
ENGINE POWER: 212CC
MAX POWER: 4KW/3600RPM
TRANSMISSION: BELT
WORKING WIDTH: 280MM
WORKING DEPTH: 50MM

GRASS STUBBLE MOWER



NSM-GSM-038
ENGINE MODEL: 170F
ENGINE POWER: 212CC
MAX POWER: 4.1KW/3600RPM
TRANSMISSION: BELT
KEY FEATURE: SELF PROPELLING
WORKING WIDTH: 380MM
WORKING DEPTH: 50MM



NSM-GSM-048
ENGINE MODEL: 170F
ENGINE POWER: 212CC
MAX POWER: 4.1KW/3600RPM
TRANSMISSION: BELT
KEY FEATURE: SELF PROPELLING
WORKING WIDTH: 480MM
WORKING DEPTH: 50MM



RK-MI-KS02 (PREMIUM)
ENGINE TYPE: NP165, 4-STROKE, AIR COOLING
DISPLACEMENT: 150CC
RATED POWER: 3KW
ENGINE SPEED: 3600RPM
KEY FEATURE: 18 KNIVES INSTALLED ON WHIRLING BLADE
START: RECOIL START
TRANSMISSION MODE: GEAR DRIVE
COLOUR: RED

MINI INTER CULTIVATOR





RK-BW-P63 (PREMIUM)
ENGINE TYPE: 2 STROKE
DISPLACEMENT: 63CC
RATED POWER: 2.4KW
IDLE SPEED: 8500-9000RPM
START: RECOIL START
FUEL TANK CAPACITY: 1300ML
COLOUR: RED / ORANGE



RK-BW-P52 (PREMIUM)
ENGINE TYPE: 2 STROKE
DISPLACEMENT: 52CC
RATED POWER: 1.45KW
IDLE SPEED: 7000RPM
START: RECOIL START
FUEL TANK CAPACITY: 1000ML
COLOUR: RED / ORANGE

BABY WEEDER



RK-SF-HP01 (PREMIUM)
MOUTH SIZE (LENGTH): 9CM
SPACING: 26-29CM
SEED CAPACITY: 2-3KGS
FERTILIZER CAPACITY: 2.5-3KGS
SEED SPACE: 13CM TO 25CM (ADJUSTABLE)
HOLE SEEDING RATE: 1-5 SEEDS (ADJUSTABLE)
MOUTH NO.: 12 TO 14 SIZE (ADJUSTABLE)
SEED PLATE: 10 **EXTRA SPRINGS:** 10



RK-MS-HP01 (PREMIUM)
MOUTH SIZE (LENGTH): 6.5CM
SPACING: 13-25CM
KEY FEATURES: SRFMTTI TESTED/
 SUBSIDY APPROVED
SEED CAPACITY: 2-3KGS
SEED SPACE: 15CM TO 23CM (ADJUSTABLE)
HOLE SEEDING RATE : 1-2 (ADJUSTABLE)
MOUTH NO.: 6 TO 10 SIZE (ADJUSTABLE)
SEED PLATE: 10
EXTRA SPRINGS: 10



RK-MS-HP02 (PREMIUM)
MOUTH SIZE (LENGTH): 9CM
SPACING: 13-25CM
KEY FEATURES: SRFMTTI TESTED/
 SUBSIDY APPROVED
SEED CAPACITY: 2-3KGS
SEED SPACE: 13CM TO 25CM (ADJUSTABLE)
HOLE SEEDING RATE: 1-2 (ADJUSTABLE)
MOUTH NO.: 7 TO 10 SIZE (ADJUSTABLE)
SEED PLATE: 10
EXTRA SPRINGS: 10

SEEDER



RK-MS-HH01 (PREMIUM)
TYPE: MANUAL SINGLE BARREL
HOLE SEEDING RATE: 1-3 SEEDS
SEEDING CAPACITY: 5000-6000 SEEDS/DAY





BRUSH CUTTER



RK-BC-UP52-SP / BP (ULTRA PREMIUM)

DISPLACEMENT: 52CC
ENGINE TYPE: 2-STROKE, AIR COOLED
ENGINE POWER: 1.5KW
KEY FEATURES: SRFMTTI TESTED/SUBSIDY APPROVED, WITH WALBRO/ WITHOUT WALBRO CARBURETOR
IDLE SPEED: 2800 - 3000RPM
FUEL: PETROL
WORKING POLE: 28/26DIA * 1.5MM(T)*1500MM
BLADES: 80T, 2T & TAP N GO
MOUNT TYPE: SIDE-PACK / BACK-PACK
COLOUR: YELLOW / BLUE




RK-BC-UP43-SP (ULTRA PREMIUM)

DISPLACEMENT: 43CC
ENGINE TYPE: 2 STROKE AIR-COOLED
ENGINE POWER: 1.25KW
KEY FEATURES: SRFMTTI TESTED/SUBSIDY APPROVED, WITH WALBRO/ WITHOUT WALBRO CARBURETOR
IDLE SPEED: 2800 - 3000RPM
FUEL: PETROL
WORKING POLE: 28/26DIA * 1.5MM(T)*1500MM
BLADES: 80T, 2T & TAP N GO
MOUNT TYPE: SIDE-PACK
COLOUR: YELLOW / BLUE



RK-BC-UP35-BP/SP (ULTRA PREMIUM)

DISPLACEMENT: 35.8CC
ENGINE TYPE: 4-STROKE, AIR COOLED, OHC
ENGINE POWER: 1.2KW
ENGINE SPEED: 7000 RPM
IDLE SPEED: 3000 - 3400 RPM
FUEL: PETROL
BLADES : 80T, 2T & TAP N GO
MOUNT TYPE: SIDE-PACK / BACK-PACK
COLOUR: RED

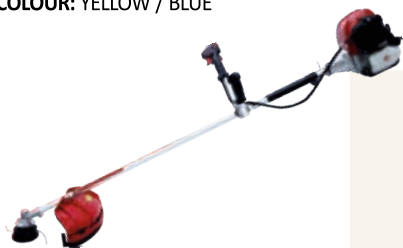

RK-BC-P50-SP (PREMIUM)

DISPLACEMENT: 50CC
ENGINE TYPE: 4-STROKE, AIR COOLED
ENGINE POWER: 1.3KW
ENGINE SPEED: 7000RPM
FUEL: PETROL
BLADES: 80T, 3T & TAP N GO
MOUNT TYPE: SIDE-PACK
COLOUR: RED



NSM-BC-C52-SP / BP (CLASSIC)

DISPLACEMENT: 52CC
ENGINE TYPE: 2-STROKE, AIR COOLED
ENGINE POWER: 1.47 KW
IDLE SPEED: 2700 - 3300RPM
FUEL: PETROL
BLADES: 80T, 2T & TAP N GO
MOUNT TYPE: SIDE-PACK / BACK-PACK
ACCESSORIES: PADDY GUARD & PADDY STAND
COLOUR: RED



NSM-BC-C43-SP / BP (CLASSIC)

DISPLACEMENT: 43CC
ENGINE TYPE: 2-STROKE, AIR COOLED
ENGINE POWER: 1.25KW
IDLE SPEED: 2700 - 3300RPM
FUEL: PETROL
BLADES: 80T, 2T & TAP N GO
ACCESSORIES: PADDY GUARD & PADDY STAND
MOUNT TYPE: SIDE-PACK
COLOUR: RED



NSM-BC-C35-SP / BP (CLASSIC)

DISPLACEMENT: 35CC
ENGINE TYPE: 4-STROKE, AIR COOLED, OHV
ENGINE POWER: 1.2KW
IDLE SPEED: 2800 - 3000RPM
FUEL: PETROL
BLADES: 80T, 2T & TAP N GO
ACCESSORIES: PADDY GUARD & PADDY STAND
MOUNT TYPE: SIDE-PACK / BACK-PACK
COLOUR: RED





CHAIN SAW



RK-CSP-UP58-18 / 22 (ULTRA PREMIUM)
ENGINE DISPLACEMENT: 58CC
ENGINE POWER: 2.3KW / 1000RPM
ENGINE TYPE: 2 STROKE, AIR COOLED
IDLE SPEED: 3000-3400RPM
BAR LENGTH: 22 & 18 INCH
FUEL TANK CAPACITY: 560ML
OIL TANK CAPACITY: 280ML
CARBURETOR TYPE: 2 PIPES



RK-CSP-UP63-18/22 (ULTRA PREMIUM)
ENGINE DISPLACEMENT: 63CC
ENGINE POWER: 2.8KW
ENGINE TYPE: 2 STORKE, AIR COOLED
IDLE SPEED: 3000-3400 RPM
BAR LENGTH: 22 & 18 INCH
FUEL TANK CAPACITY: 560ML
OIL CAPACITY: 280ML



NSM-CSP-C58-18 / 22 (CLASSIC)
ENGINE DISPLACEMENT: 58CC
ENGINE POWER: 2.3KW / 1000RPM
ENGINE TYPE: 2 STROKE, AIR COOLED
IDLE SPEED: 3000-3400RPM
BAR LENGTH: 22 & 18 INCH
FUEL TANK CAPACITY: 560ML
OIL TANK CAPACITY: 280ML

WATER PUMP



RKS-30 (ULTRA PREMIUM)
ENGINE TYPE: 4 STROKE, AIR COOLED
ENGINE DISPLACEMENT: 212CC
SPEED: 3600RPM
STARTER: RECOIL
FUEL TYPE: PETROL
DIAMETER INLET/OUTLET: 3 INCH
MAX SUCTION HEAD: 8M
MAX LIFT HEAD & FLOW: 30MM & 50M3/H



RK-WP-P03' (PREMIUM)
ENGINE: 4 STROKE AIR COOLED
ENGINE DISPLACEMENT: 212CC
SPEED: 3600 RPM
STARTER: RECOIL
FUEL TYPE: PETROL
DIAMETER INLET / OUTLET: 3 INCH
MAX SUCTION HEAD: 8M
MAX LIFT HEAD & FLOW: 30M & 50M3/H



RK-WP-P02' (PREMIUM)
ENGINE: 4 STROKE AIR COOLED
ENGINE DISPLACEMENT: 212CC
SPEED: 3600 RPM
STARTER: RECOIL
FUEL TYPE: PETROL
DIAMETER INLET / OUTLET: 2 INCH
MAX SUCTION HEAD: 8M
MAX LIFT HEAD & FLOW: 26M & 35M3/H



RK-WP-P1.5' (PREMIUM)
ENGINE: 4 STROKE AIR COOLED
ENGINE DISPLACEMENT: 98CC
SPEED: 3600 RPM
STARTER: RECOIL
FUEL TYPE: PETROL
DIAMETER INLET / OUTLET: 1.5 INCH
MAX SUCTION HEAD: 7M
MAX LIFT HEAD & FLOW: 18M & 11M3/H





WATER PUMP ATTACHMENTS



RK-PW-WP-D80
INLET & OUTLET SIZE: 3 INCH / 80MM
FLOW MAX: 40 M3/H
SUCTION: 7M
DISCHARGE: 40M
SPEED: 3600RPM
PTO SHAFT SIZE: 18MM
FOR GEAR DRIVE DIESEL MODELS



RK-PW-WP-P80
INLET & OUTLET SIZE: 3 INCH / 80MM
FLOW MAX: 40 M3/H
SUCTION: 7M
DISCHARGE: 40M
SPEED: 3600RPM
PTO SHAFT SIZE: 14 MM
FOR GEAR DRIVE PETROL MODELS



RK-SU80
INLET & OUTLET SIZE: 3 INCH / 80MM
FLOW MAX: 40 M3/H
SUCTION: 7M
DISCHARGE: 40M
SPEED: 3600RPM
FOR BELT DRIVE MODELS

SUBMERSIBLE SEWAGE WATER PUMP



WQD10-11-0.75A
POWER: 0.75KW
MAX FLOW: 433L/M
MAX HEAD: 14M
VOLTAGE: 220V
SPEED: 2850RPM
NET WEIGHT: 18.5KG



WQD15-10-1.1FA
POWER: 1.1KW
MAX FLOW: 433L/M
MAX HEAD: 15M
VOLTAGE: 220V
SPEED: 2850RPM
NET WEIGHT: 24KG



WQD15-15-1.5FA
POWER: 1.5KW
MAX FLOW: 416L/M
MAX HEAD: 19M
VOLTAGE: 220V
SPEED: 2850RPM
NET WEIGHT: 27KG

HOSE PIPES



RK-HP1/2-8.5*50 | RK-HP1/4-8.5*50 |
RK-HP1/2-10*50 | RK-HP1/4-10*50
DIAMETER: 8.5MM / 10MM
LENGTH: 50MTR
THICKNESS: 5 LAYER
BURST PRESSURE: 280KG/CM SQ
MATERIAL: PREMIUM QUALITY PVC
COCK: BOTH FEMALE / ONE MALE ONE FEMALE



RK-HP1/2-8.5*100 | RK-HP1/4-8.5*100 |
RK-HP1/2-10*100 | RK-HP1/4-10*100
DIAMETER: 8.5MM / 10MM
LENGTH: 100MTR
THICKNESS: 5 LAYER
BURST PRESSURE: 280KG/CM SQ
MATERIAL: PREMIUM QUALITY PVC
COCK: BOTH FEMALE / ONE MALE ONE FEMALE





EARTH AUGER



RK-EA-P68 (PREMIUM)
ENGINE TYPE: SINGLE CYLINDER, 2 STROKE
DISPLACEMENT: 68CC
COOLING TYPE: AIR-COOLED
FUEL USED: PETROL
AUGER SPEED: 0 - 350 RPM
FUEL/OIL MIXING: 25:1
FUEL TANK CAPACITY: 1L
STARTER: RECOIL STARTER



RK-EA-P52 (PREMIUM)
ENGINE TYPE: SINGLE CYLINDER, 2-STROKE
DISPLACEMENT: 52CC
COOLING TYPE: AIR-COOLED
FUEL USED: PETROL
AUGER SPEED: 0 - 350/MIN
FUEL/OIL MIXING: 25:1
FUEL TANK CAPACITY: 1L
STARTER: RECOIL STARTER



NSM-EA-P68 (PREMIUM)
ENGINE TYPE: SINGLE CYLINDER, 2 STROKE
DISPLACEMENT: 68CC
COOLING TYPE: AIR-COOLED
FUEL USED: PETROL
AUGER SPEED: 0 - 350 RPM
FUEL/OIL MIXING: 25:1
FUEL TANK CAPACITY: 1L
STARTER: RECOIL STARTER



NSM-EA-P52 (PREMIUM)
ENGINE TYPE: SINGLE CYLINDER, 2-STROKE
DISPLACEMENT: 52CC
COOLING TYPE: AIR-COOLED
FUEL USED: PETROL
AUGER SPEED: 0 - 350/MIN
FUEL/OIL MIXING: 25:1
FUEL TANK CAPACITY: 1L
STARTER: RECOIL STARTER



NSM-EA-P55 (PREMIUM)
ENGINE TYPE: SINGLE CYLINDER, 4-STROKE
DISPLACEMENT: 55CC
COOLING TYPE: AIR-COOLED
FUEL USED: PETROL
FUEL TANK CAPACITY: 2L
STARTER: RECOIL STARTER



RK-EP-KT
ENGINE TYPE: FORCE AIR COOLED, 4 STROKER, OHV
ENGINE POWER: 3.9KW
DISPLACEMENT: 212CC
ENGINE SPEED: 3600RPM
FUEE: PETROL
FUEL TANK CAPACITY: 3.6L
START: RECOIL START
TYPE OF CRANKSHAFT: KEY TYPE
TYPE OF AIR FILTER: SPONGE TYPE



RK-EP-ST
ENGINE TYPE: FORCE AIR COOLED, 4 STROKER, OHV
ENGINE POWER: 3.9KW
DISPLACEMENT: 212CC
ENGINE SPEED: 3600RPM
FUEL: PETROL
FUEL TANK CAPACITY: 3.6L
START: RECOIL START
TYPE OF CRANKSHAFT: SHAFT TYPE
TYPE OF AIR FILTER: OIL BATH TYPE

ENGINES





KNAPSACK



RK-KSA-708/350

ENGINE: 4 STROKE, GX35
DISPLACEMENT: 31.5CC
ENGINE POWER: 0.9KW/7000RPM
SPRAYER HEAD TYPE: ALUMINIUM
PRESSURE: 20KG/CM2
FLOW: 5-8 L/MIN
PLUNGER NO. DIA STROKE: 1*18*8 MM
TANK CAPACITY: 20L



RK-KSC-708/350

ENGINE: 4 STROKE, GX35
DISPLACEMENT: 31.5CC
ENGINE POWER: 0.9KW/7000RPM
SPRAYER HEAD TYPE: COPPER
PRESSURE: 20KG/CM2
FLOW: 5-8 L/MIN
PLUNGER NO. DIA STROKE: 1*18*8 MM
TANK CAPACITY: 20L

SPRAYER



RK-KSA-767/139F

ENGINE: 4 STROKE, 139F
DISPLACEMENT: 31.5CC
ENGINE POWER: 0.7KW/7000RPM
SPRAYER HEAD TYPE: ALUMINIUM
PRESSURE: 20KG/CM2
FLOW: 5-8 L/MIN
PLUNGER NO. DIA STROKE: 1*18*8 MM
TANK CAPACITY: 20L / 25L



RK-KSC-767/139F

ENGINE: 4 STROKE, 139F
DISPLACEMENT: 31.5CC
ENGINE POWER: 0.7KW/7000RPM
SPRAYER HEAD TYPE: COPPER
PRESSURE: 20KG/CM2
FLOW: 5-8 L/MIN
PLUNGER NO. DIA STROKE: 1*18*8 MM
TANK CAPACITY: 20L / 25L



RK-KSA-769/1E34F

ENGINE: 1E34F, AIR COOL TYPE, 2 STROKE
DISPLACEMENT: 25.6CC
ENGINE POWER: 1.2HP/7000RPM
SPRAYER HEAD TYPE: ALUMINIUM
PRESSURE: 7.1L/MIN
TANK CAPACITY: 15L



RK-KSC-769/1E34F

ENGINE: 1E34F, AIR COOL TYPE, 2 STROKE
DISPLACEMENT: 25.6CC
ENGINE POWER: 1.2HP/7000RPM
SPRAYER HEAD TYPE: COPPER
PRESSURE: 7.1L/MIN
TANK CAPACITY: 15L

PORTABLE



RK-PSC-768/350

ENGINE: 4 STROKE, GX35
DISPLACEMENT: 31.5CC
ENGINE POWER: 0.9 KW/7000RPM
SPRAYER HEAD TYPE: COPPER
PRESSURE: 20 KG/CM2
FLOW: 5-8 L/MIN
PLUNGER NO. DIA STROKE: 1*18*8 MM



RK-PSA-768/350

ENGINE: 4 STROKE, GX35
DISPLACEMENT: 31.5CC
ENGINE POWER: 0.9 KW/7000RPM
SPRAYER HEAD TYPE: ALUMINIUM
PRESSURE: 20KG/CM2
FLOW: 5-8 L/MIN
PLUNGER NO. DIA STROKE: 1*18*8 MM





HTP POWER SPRAYER



RK-HTP-22A
OUTPUT PRESSURE: 0-40 KG/CM²
SPEED: 800-1200 RPM
SUCTION: 20-30L/MIN
REQUIRED ENGINE: 1-2HP
NO. OF PISTONS: 3
COCK: 1/4 INCH, 1/4 INCH (BOTH MALE)



RK-HTP-30A
OUTPUT PRESSURE: 0-40 KG/CM²
SPEED: 800-1200 RPM
SUCTION: 30-45L/MIN
REQUIRED ENGINE: 3-5.5HP
NO. OF PISTONS: 3
COCK: 1/2 INCH, 1/2 INCH

SPRAYER



RK-HTP-50A
OUTPUT PRESSURE: 1-5KG/CM²
SPEED: 800-1200RPM
SUCTION: 44-66L/MIN
REQUIRED ENGINE: 5-6.5HP
NO. OF PISTONS: 3
COCK: 1/2 INCH, 1/2 INCH & 1/2 INCH



RK-HTP-80A
OUTPUT PRESSURE: 1-5KG/CM²
SPEED: 800-1200RPM
SUCTION: 65-80L/MIN
REQUIRED ENGINE: 3-7.5HP
NO. OF PISTONS: 3
COCK: 1/2 INCH, 1/2 INCH

POWER SPRAYER SET



MI-SSP-C22
ENGINE: 4 STROKE, SINGLE CYLINDER, AIR COOLED
REQUIRED POWER: 5.5HP
ENGINE SPEED: 4000RPM
OUTPUT PRESSURE: 10-40KG/MC²
SUCTION: 13-22L/MIN



MI-SSPU-C22
ENGINE: 4 STROKE, SINGLE CYLINDER, AIR COOLED
REQUIRED POWER: 5.5 HP
ENGINE SPEED: 4000RPM
OUTLET PRESSURE: 10-40 KG/MC²
SUCTION: 13-22 L/MIN
FRAME: U TYPE



MI-SSP-C30
ENGINE: 4 STROKE, SINGLE CYLINDER, AIR COOLED
REQUIRED POWER: 6.5 HP
ENGINE SPEED: 4000RPM
OUTLET PRESSURE: 20-35KG/MC²
SUCTION: 30-40 L/MIN



CHAFF CUTTER



RK-CC-2.0 (ULTRA PREMIUM)

MOTOR POWER: 2.2KW (3HP) SINGLE PHASE
KEY FEATURE: SRFMTTI TESTED / SUBSIDY APPROVED
CHOPPING CAPACITY: 2800KG/HRS
 SUPPORTED FOR DRY & GREEN GRASS
CUTTING SPEED: 1400RPM
VOLTAGE: 220V
NO. OF KNIFE BLADES: 5 BLADES MANGANESE 65 GRADE
GEAR: TO ADJUST FODDER CUTTER SIZE
CONVEYER BELT: FAST, SAFE & AUTOMATIC OF INPUT
ROLLER: SELF ADJUSTABLE FROM SIZE 10-35MM
OPERATING SYSTEM: GEAR WITH CHAIN



RK-CC-2.8 (ULTRA PREMIUM)

MOTOR POWER: 2.2KW (3HP) SINGLE PHASE
CHOPPING CAPACITY: 2800KG/HRS
 SUPPORTED FOR DRY & GREEN GRASS
CUTTING SPEED: 1400RPM
VOLTAGE: 220V
NO. OF KNIFE BLADES: 5 BLADES MANGANESE 65 GRADE
GEAR: TO ADJUST FODDER CUTTER SIZE
CONVEYER BELT: FAST, SAFE & AUTOMATIC OF INPUT
ROLLER: SELF ADJUSTABLE FROM SIZE 10-35MM
OPERATING SYSTEM: GEAR WITH CHAIN




RK-CC-3.2 (ULTRA PREMIUM)

MOTOR POWER: 3KW
CHOPPING CAPACITY: >3000KG/HRS
 SUPPORTED FOR DRY & GREEN GRASS
CUTTING SPEED: 1400RPM
VOLTAGE: 220V

MAIZE THRESHER



CUTTING SPEED: 2000RPM
PRODUCTION CAPACITY: >2000KG/H
MOTOR POWER: 1.5KW
MOTOR SPEED: 2800RPM
VOLTAGE: 220V
ELECTRICITY: 3.45A
FREQUENCY: 50HZ




CUTTING SPEED: 2000RPM
PRODUCTION CAPACITY: 1500 KGS/HR
MOTOR POWER: 0.75KW
MOTOR SPEED: 2800RPM
VOLTAGE: 220V
ELECTRICITY: 3.45A
FREQUENCY: 50HZ



AUTOMATIC GRADE: SEMI-AUTOMATIC
CUTTING SPEED: 1600RPM
PRODUCTION CAPACITY: 21500-2000KG/HR
MOTOR POWER: 0.75KW
VOLTAGE: 220V
ELECTRICITY: 0.8KW/H
FREQUENCY: 50 HZ

REAPER

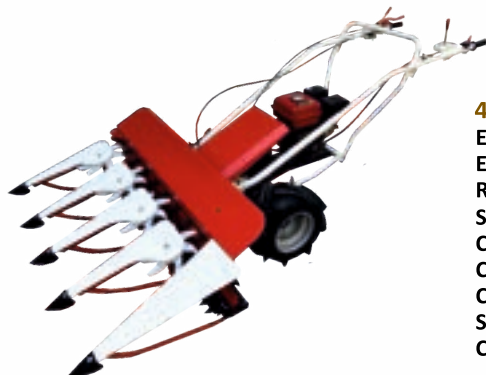

4G120

ENGINE: PETROL ENGINE
ENGINE POWER: 4.41KW
RATED SPEED: 3600RPM
SPEED: 3.02~3.93 KM/H
CUTTING WIDTH: 120CM
CUTTING TYPE: STANDING CUTTING
CUTTER TYPE: RECIPROCATING SHEAR TYPE
START: HAND PULL TYPE (MANUAL)
CROP TYPE: SHORT & LONG CROPS







Factory & Corporate Office

Plot No. A-18, Industrial Area Phase - 2, Dombivli East - 421 203
Thane, Maharashtra, India

Branch Office

176/3d, Aanaimalai Amman Kovil, L & T by Pass Road, Coimbatore - 641 111
Tamil Nadu, India

Contact

 royalkissanagro.com

 90909 24000

 info@royalkissanagro.com